

- Displayed with 7-inch color LCD
- ON/OFF history record
- Alarm tone selectable
- Routine test available
- Password set by menu
- Data interface to BAM/INS
- Type approval with DNV (MED) and CCS



- Conforms to the latest rules, including IMO MSC.128 (75), MSC.302 (87), IEC 62616.
- 7-inch Color LCD used in the Control Unit.
- Automatically record ON/OFF history.
- Pre-stored tones are selectable for alarm.
- A password is used to set operation mode and dormant time.
- 2nd alarm units can be selected separately.
- Test function and emergency call available.



SPECIFICATIONS

- Mode: MANUAL ON, MANUAL OFF
- Alarm: Visual, 1st Stage Audio, 2nd Stage Audio, 3rd Stage Audio
- Dormant: 3~12 mins (selectable)
- Accuracy: $\pm 5s$
- Sound: 75~85 dB (A)
- Power Input: DC 24V, AC 100V~240V
- Input Port: RS422×1 port, Reset ON/OFF×9 CH
- Output Port: RS422×1 port, Alarm×10 CH, Failure Output×1 CH
- IP Grade: IP22 (Control Unit, Junction Box, Alarm Unit)
IP56 (Reset Unit)

EQUIPMENT LIST


● STANDARD

- Control Unit NBW-1000 1 unit
- Junction Unit NBW-1050J 1 unit
- Reset Unit NBW-1090RW 1-4 unit
- Alarm Unit NBW-1010A 1-10 unit
- Accessories 1 set



● OPTIONS

- Motion Detector NBW-1090P
- Flush Mount Bracket for Control Unit 1 pc

WATCH ALARM CHART

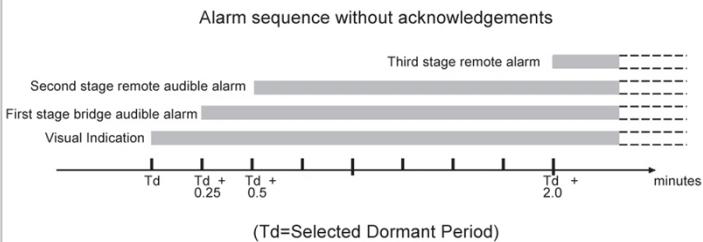

SIZE DIMENSION

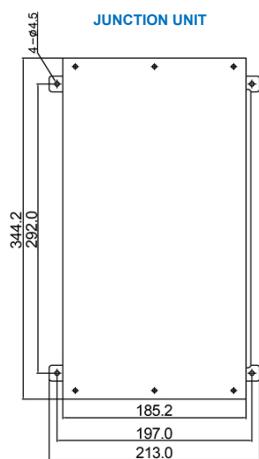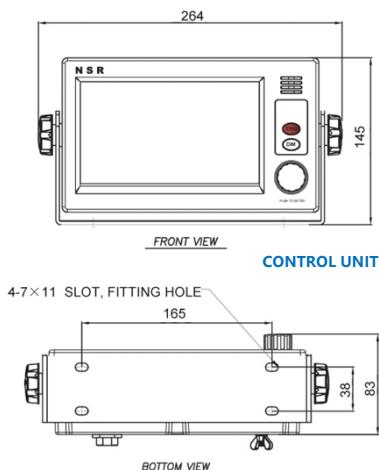

JUNCTION UNIT



RESET UNIT



ALARM UNIT



MOTION DETECTOR

