

- Watertight design
- Either primary battery or secondary battery is available
- External MIC/Speaker can be attached
- Type approval with DNV (MED) and CCS



- Designed to meet GMDSS requirements related to performance standards for survival craft two-way VHF radio telephone apparatus, such as IMO MSC.515 (105), IEC 61097-12.
- Compact, lightweight and rugged construction.
- Full marine-use VHF channels can be available.




SPECIFICATIONS

● TECHNICAL SPECIFICATIONS

- Frequency Range: 156.025~157.425 MHz (TX)
156.050~162.000 MHz (RX)
- Operating Channels: 19 channels (default)
- Operating Hours: ≥8 hours (TX10%, RX10%, Standby80%)
- Output Power: High 3.0 W / Low 0.5 W
- BATTERY REQUIREMENTS (NBT200)**
- Storage Life: Max 5 years
- OPERATING TEMP:** -20°C~+55°C
- STORAGE TEMP:** -40°C~+70°C
- SIZE & WEIGHT**
- Size: 256 (H)×56 (W)×46.2 (D) mm
- Weight: 200g (Transceiver + Antenna + Emergency Battery)

SIZE DIMENSION

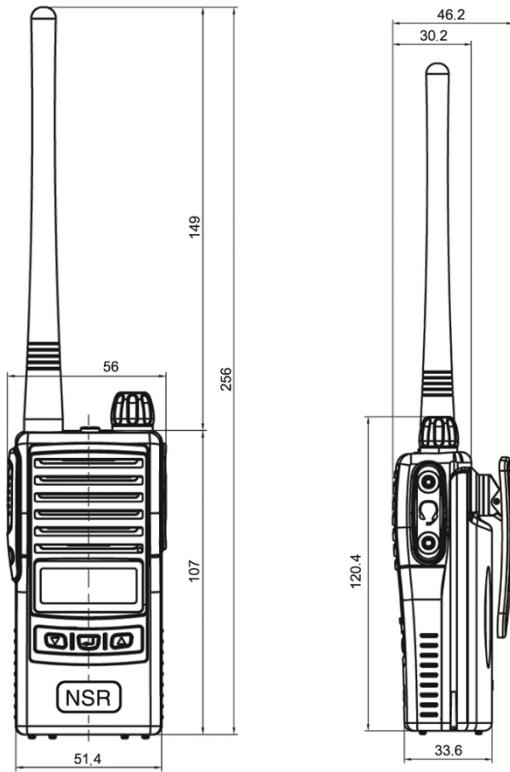

EQUIPMENT LIST

● STANDARD

- Transceiver & Antenna NTW-1000 1 set
- Emergency Battery NBT200 1 pc
- Belt Clip 1 pc
- Wrist Rope 1 pc
- Rechargeable Battery NBT200C 1 pc
- Battery Charger NBT200CU 1 pc
- AC/DC Adaptor NBT200CUA 1 pc



Battery
Emergency / Rechargeable



Wrist Rope



Belt Clip



Battery Charger



AC/DC Adaptor