

NSR's new generation of two-way VHF radio:

- Watertight design
- Either primary battery or secondary battery is available
- 4-digit channels available
- External MIC/Speaker can be attached
- Type approval with CCS



- Designed to meet GMDSS requirements related to performance standards for survival craft two-way VHF radio telephone apparatus, such as IMO MSC.515 (105), MSC.1/Circ.1460/Rev.5 and IEC 61097-12.
- Compact, lightweight and rugged construction.
- Full marine-use VHF channels can be available.




SPECIFICATIONS

● TECHNICAL SPECIFICATIONS

- Frequency Range: 156.000~161.450 MHz (TX)
156.000~163.425 MHz (RX)
- Operating Channels: 33 channels (default)
- Operating Hours: ≥8 hours (TX10%, RX10%, Standby80%)
- Output Power: High 3.0 W / Low 1.0 W
- BATTERY REQUIREMENTS**
- Storage Life for NBT800: Max 5 years
- OPERATING TEMP:** -20°C~+55°C
- STORAGE TEMP:** -40°C~+70°C
- SIZE & WEIGHT**
- Size: 277.5 (H)×60.8 (W)×44.7 (D) mm
- Weight: 250g (Transceiver + Antenna + Emergency Battery)

SIZE DIMENSION

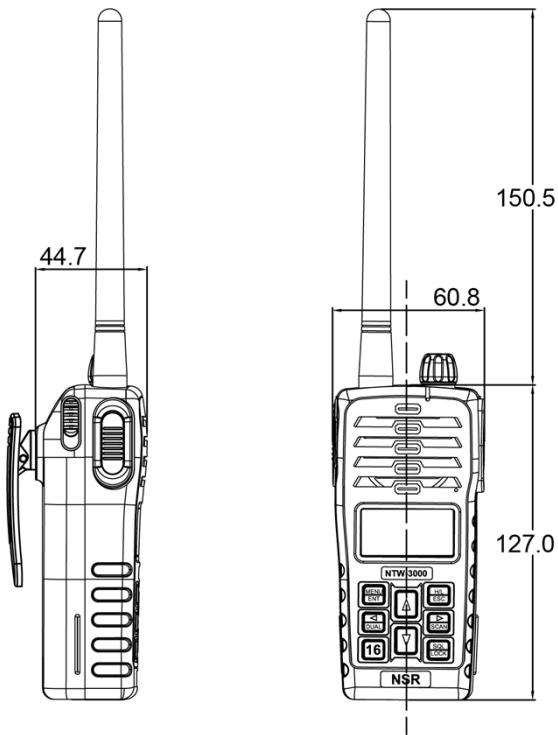

EQUIPMENT LIST

● STANDARD

- Transceiver & Antenna NTW-3000 1 set
- Emergency Battery NBT800 1 pc
- Belt Clip 1 pc
- Wrist Rope 1 pc
- Rechargeable Battery NBT800C 1 pc
- Battery Charger NBT800CU 1 pc
- AC/DC Adaptor NBT200CUA 1 pc



Battery
Emergency / Rechargeable



Wrist Rope Belt Clip



Battery Charger



AC/DC Adaptor