


ELECTRONIC INCLINOMETER

NEI-3000

NSR's new Electronic Inclinometer:

- High accuracy and stability
- Large color LCD, touch screen operation
- Android O/S for easy operation
- Log for Heel Angle and Pitch Angle
- Meet the IMO and ISO standards
- Type approval with DNV (MED) and CCS

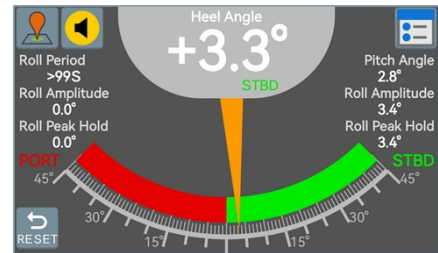

- NEI-3000 electronic inclinometer is designed for vessel navigation, which provides heel and pitch measuring functions.
- NEI-3000 measures and displays heel angle, roll period, roll amplitude and pitch angle etc.
- Additional log of heel angle for the latest 3 minutes and roll amplitude for the latest 30 minutes.
- NEI-3000 conforms to the standards of IMO MSC.363 (92), MSC.302 (87) and ISO 19697.



SPECIFICATIONS

- Heel Angle: Range: $\pm 90^\circ$, Accuracy: $\pm 1^\circ$
- Roll Amplitude: Range: $\pm 90^\circ$, Accuracy: $\pm 1^\circ$
- Roll Period: Range: 4~ 40 sec, Accuracy: $\pm 1s$
- Pitch Angle: Range: $\pm 90^\circ$, Accuracy: $\pm 1^\circ$
- O/S: Android
- LCD Display: Touch screen operation
 - Size: 7 inch
 - Resolution: 1024×600
- Interface: I/O sentence (IEC 61162-1 & IEC 61162-2)
- Power Supply: DC 24 V (range 9 V ~ 36 V)
- Power Consumption: <10W
- Size: 145 (H) × 264 (W) × 83 (D) mm (Display Unit)
- Weight: 1.3kg (Display Unit)
- IP Grade: IP22

EQUIPMENT LIST

● STANDARD


- Display Unit NEI-3000D 1 pc
- Sensor Unit NEI-3000S 1 pc
- Accessories 1 set

● OPTIONS


- Flush Mount Bracket 1 pc




SYSTEM DIAGRAM

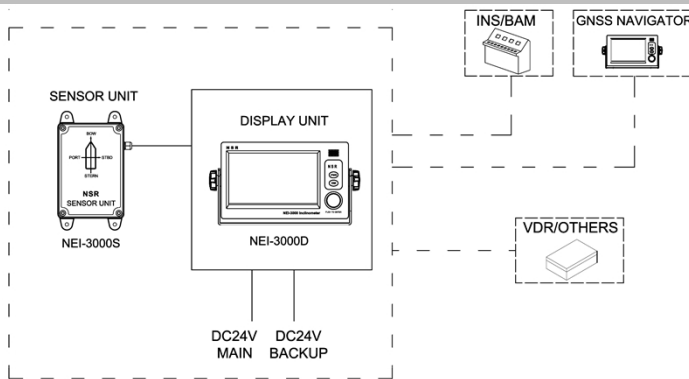

SIZE DIMENSION

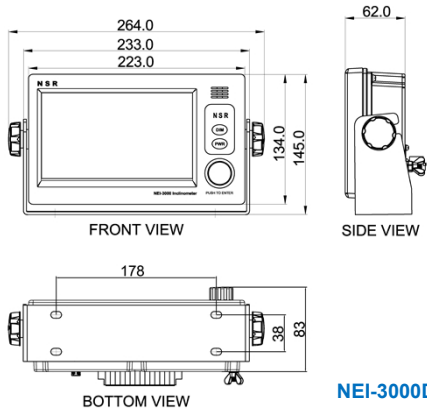

NEI-3000D

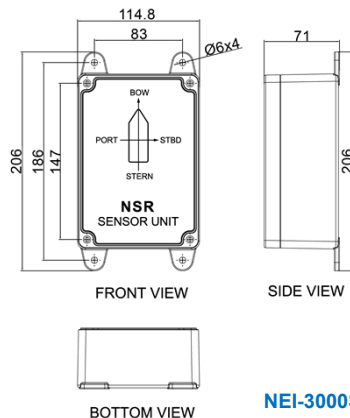

NEI-3000S